


DESIGNED TO DAZZLE.
**ENGINEERED
 TO ENDURE.**



**Experience unprecedented image quality
 with unmatched convenience.**

The best and brightest in large venue projection is now at your command, with Epson's L-Series Large Venue Laser Projectors. Powered by up to 12,000 lumens of brightness, you are assured of rich, vibrant colours and a laser-sharp WUXGA image - consistently. Designed for flexible 360° installation, Epson L-Series laser projectors deliver an unprecedented viewing experience with greater reliability.

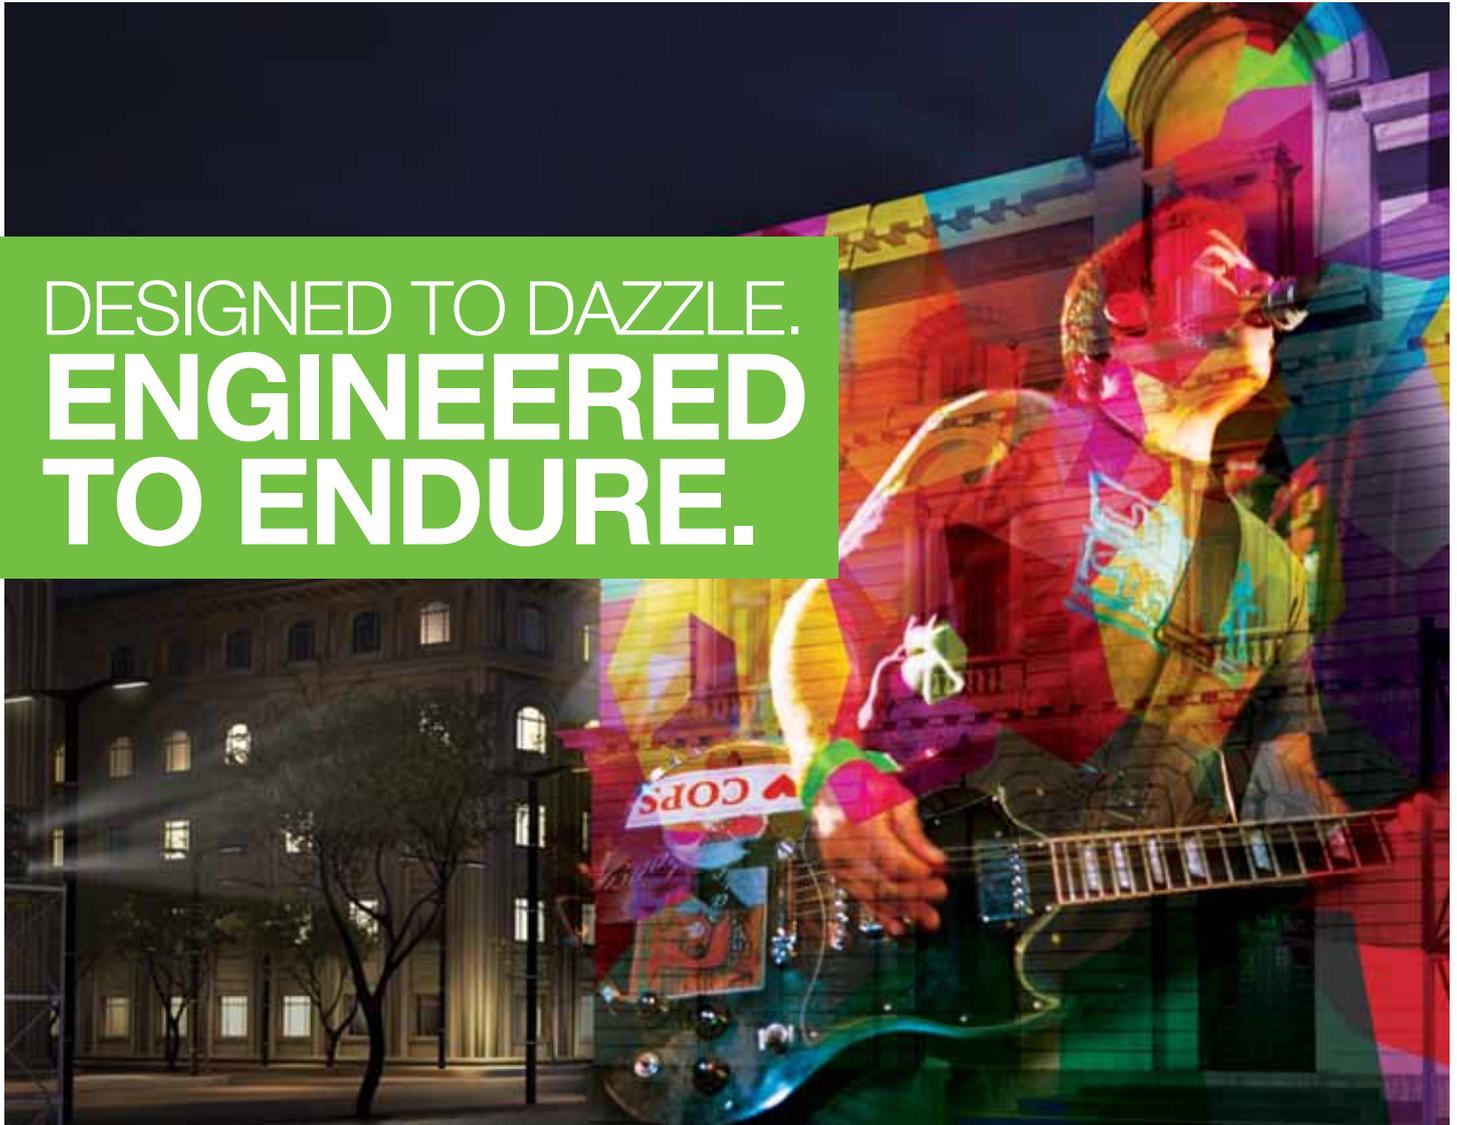

EB-L1405U / L1505U

- 
High
Brightness
- 
Flexible
Installation
- 
Edge
Blending
- 
Arc
Correction
- 
Point
Correction
- 
Split Screen
- 
iProjection*

ENGINEERED FOR BUSINESS

Stunning Projection Quality

Deliver large breathtaking images with beyond Full HD resolution and up to 12,000 lumens.

Practical Versatility

Edge-blending and point correction features enable seamless projections and HDBaseT port increases connectivity.

Durable Design

Innovative design ensures a guaranteed* 24/7 performance of 20,000 hours or 2 years (whichever comes first).

* Source: Futuresource Consulting.
 * Approximate time until brightness decreases 50% from first usage. Measured by acceleration test assuming use of 0.04 - 0.20 mg/m³ of particulate matter. Time varies depending on usage conditions and environments.
 * 2 years or 20,000 hours whichever comes first.
 1. The EB-L1505U is the first and only 12,000 lm WUXGA LCD laser projector on the market as of February 2016.
 2. Laser life of up to 56,000 hours in custom mode.



THE WORLD NO.1
 17 YEARS RUNNING

MODEL NUMBER	EB-L1405U	EB-L1505U
Projection Technology	RGB Liquid Crystal Shutter Projection System (3LCD)	
Specifications of Main Parts		
LCD	Size	0.76" wide panel (D10) 1.03" wide panel (D10)
	Native Resolution	WUXGA
Projection Lens	Support	4K Enhancement
	Type	Power Zoom / Power Focus / Power Shift
Lens Shift	F-Number	1.7 - 2.3 1.8 - 2.5
	Focal Length	24.02 - 38.24 mm 36 mm - 57.35 mm
	Zoom Ratio	1 - 1.6 1 - 1.61
	Throw Ratio	1.45 - 2.32 (Wide - Tele) 1.57 - 2.56 (Wide - Tele)
	Mode	Powered Powered
Lens Shift	Vertical (Up/Down)	±67% (H Centre) ±60% (H Centre)
	Horizontal (Left/Right)	±30% (V Centre) ±18% (V Centre)
Laser Light source	20,000 Hours Durability (Normal), 30,000 Hours Durability (Extended)	
Screen Size (Projected Distance)		
Zoom: Wide	50" - 300" [1.53 m - 9.44 m]	60" - 500" [1.99 m - 17.17 m]
	50" - 300" [2.48 m - 15.10 m]	60" - 500" [3.26 m - 27.77 m]
	100" screen [3.11 m - 5.00 m]	100" screen [3.37 m - 5.49 m]
Zoom: Tele	50" - 300" [2.48 m - 15.10 m]	60" - 500" [3.26 m - 27.77 m]
	100" screen [3.11 m - 5.00 m]	100" screen [3.37 m - 5.49 m]
Standard Size	100" screen [3.11 m - 5.00 m]	100" screen [3.37 m - 5.49 m]
	100" screen [3.11 m - 5.00 m]	100" screen [3.37 m - 5.49 m]
Brightness*2		
White Light Output	8,000 lm / 5,600 lm	12,000 lm / 8,400 lm
	8,000 lm	12,000 lm
Colour Light Output	2,500,000:1	2,500,000:1
Contrast Ratio		
Geometric Correction		
Keystone Correction		
Vertical / Horizontal	±45° / ±30° (Zoom: Tele with Standard Zoom Lens)	
	Yes	
Quick Corner / Curved Surface	Yes	
Point Correction / Corner Wall	Yes	
Connectivity		
Analog Input	5-BNC	1
	D-sub 15pin	1
Digital Input	HDMI	1
	HDBaseT	RJ-45
	DVI-D	1
	SDI	BNC
Output Terminal	D-sub 15 pin	1
Audio Input	Stereo Mini	3
Audio Output	Stereo Mini Jack	1
USB Interface	USB Type A	1 (for Wireless LAN, Firmware update, Copy OSD Settings)
	USB Type B	1 (for Firmware update, Copy OSD Settings)
Control I/O	RS-232C	D-Sub 9pin x 1
	Remote Control Input	Stereo mini jack x 1
Network	Wired LAN	RJ-45
	Wireless Optional LAN	USB Type A (for ELPAP10: Optional)
Multi-PC Projection	Yes	
Operating Temperature		
0°C - 45°C <32°F - 113°F> (0 m / 0 ft - 1,500 m / 4,921 ft)		
Operating Altitude		
0 m - 3,048 m <0 ft - 10,000 ft> (Over 1,500 m / 4,921 ft : with High altitude mode)		
Direct Power On / Off		
Yes		
Start-Up Period		
Less than 7 seconds, Warm-up period: 30 seconds		
Cool Down Period		
Instant Off or 0 second		
Power Supply Voltage		
100 V - 240 V AC ±10%, 50 / 60 Hz		
Power Consumption (220 V - 240 V)		
Lamp On (Normal / Eco)	625 W / 417 W	908 W / 597 W
Standby / Energy Saving	2.4 W / 0.28 W	2.3 W / 0.33 W
Dimension Excluding Feet (W X H X D)		
586 mm x 185 mm x 492 mm		
Weight (Without Lens)		
Approx. 19.5 kg		Approx. 22.0 kg
Fan Noise (Normal / Eco)		
35 dB / 29 dB		37 dB / 30 dB
Air Filter	Maintenance Cycle	20,000 hours*4
Warranty		2 years*5

Supplied Accessories

Power Cable (3 m)
Computer Cable (VGA Cable) -1.8 m
Remote Control
Cable Cover
Epson Projection Software CDROM
Cable Clamp: 1 (For HDMI Cable)
User's Manual Set
Battery x 2

Optional Accessories

Spare Lamp: ELPLP76
Air Filter: ELPAF51
Wireless LAN: ELPAP10
Quick Wireless Connection USB Key: ELPAP09
Remote Control Cable Set: ELPKC28 (10 m x 2)
HDBaseT Transmitter: ELPHD01
Polarizers: ELPLL01^
Passive 3D Glasses: Yes
Ceiling Mount: ELPMB47, ELPMB48

Optional Lenses (New)

EB-L1405U	EB-L1505U
ELPLX01	
ELPLU03	ELPLU03
ELPLU04	ELPLU04
ELPLW05	ELPLU04
ELPLW06	ELPLU06
ELPLM08	
ELPLM09	ELPLM09
ELPLM10	ELPLM10
ELPLM11	ELPLM11
ELPLL08	ELPLL08

EB-L1405U / L1505U



©2017 Epson India Pvt. Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Information correct as on January 2018

*1 Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.

*2 Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.

*3 Maximum speed and range is achievable when used with same enhanced mode technology. Actual data rates, features and performance may vary depending on your computer system, the environment and other factors.

*4 When used in the general office environment (the amount of floating dust: 0.04 - 0.2 mg/m³). Based on the Epson's in-house test results. 25°C (77°F).

*5 All projectors have a warranty for 2 years onsite against standard manufacturing defects excluding the lamp. Lamp carries a warranty for 1 year or 1,000 hours whichever is first.

^ Only works with ELPLW06 / ELPLM08 / ELPLM09 / ELPLM10 and ELPLW04 / ELPLS04 / ELPLM06

DISCLAIMER: While efforts have been made to provide accurate information, there could be printing errors, which may have crept in. In the event of any discrepancy, the Product Operating Instructions supplied with products shall be the authentic reference point. Features, specifications, dimensions, weight and prices mentioned are subject to change without prior notice. Actual products may differ slightly in appearance to illustrations/pictures provided.

EPSON INDIA PVT. LTD.

12th Floor, The Millenia, Tower A, No.1,
Murphy Road, Ulsoor, Bangalore - 560 008.
Tel: 080-30515000 Fax: 080-30515005

Regional Offices:

Ahmedabad - 2640 7176/77, Chennai - 3967 7500, Cochin - 4012 315,
Coimbatore - 98942 19200, Hyderabad - 6463 9640/41, Kolkata - 6500 9370/77,
Mumbai - 3079 8200, New Delhi - 3312 0300/01, Pune - 3028 6000/05

Dealer's Stamp



Epson Helpline: For product info or service - 1800 425 0011
For service - 1860 3000 1600 (9AM - 6PM) (Mon - Sat)
Email: emp@eid.epson.co.in

www.epson.co.in